

Rev. 07/2025

## **TUBE FIX SHOWER PLATE**

Shower connection plate center  
distance 150 mm

# TUBE FIX SHOWER PLATE

Shower connection plate center  
distance 150 mm.

\*



## MANUFACTURING RANGE

Reference	Dimension	Fitting	Center distance
43340416	Ø16 – ½ FF	MM UNI-EN-ISO 228	150 mm

## DESCRIPTION

The **TUBE FIX Plate** is a kit specially designed for fixing a tap onto a plasterboard or honeycomb partition. For installing a sanitary tap with a 150 mm center distance (shower and bathtub), with press fittings for connection to 16mm multilayer pipes. The TUBE-FIX plate is the most innovative solution: quick installation, accessible, and without anchors.

## OPERATING PRINCIPLE

It consists of fixing a steel support plate onto a plasterboard or honeycomb partition, on which 2 elbows with their specific press fittings are positioned and connected directly to the multilayer pipes. The entire fixing system "disappears" under the layer of adhesive and the chosen wall covering, becoming completely invisible to the naked eye.

## KIT COMPOSITION

- 1 pre-assembled kit ready to install (do not disassemble)
- 2 chrome-plated brass elbows ready to connect to pipes
- 2 nuts and 6 screws for fixing the elbows to the plate
- 1 nut adjustment tool
- 2 protective caps

## ADVANTAGES

- quick and secure installation (inspection windows)
- multi-profile pressing: th-h-u-b-f
- installation without anchors (patented system)
- easy to tile

## SPECIFICATION

---

European patents.

---

For plasterboard partition (type BA13) from 13 mm to 26 mm

---

Fittings for 16x2 mm multilayer pipes

---

Fittings tested for 1000 cycles at 3 bars (cold water: 20°/15' - hot water: 90°/15')

---

Multi-profile press fittings (jaw profiles: TH-H-U-B-F) QB certification TH profile

---

Center distance: 150 mm

---

## TECHNICAL CHARACTERISTICS


---

Compatible liquid	Water
Max. operating pressure	10 bar
Working temperature	95 °C
Elbow	CW617N brass
Plate	Stainless Steel

---

## INSTALLATION

Elbows already screwed onto the plate

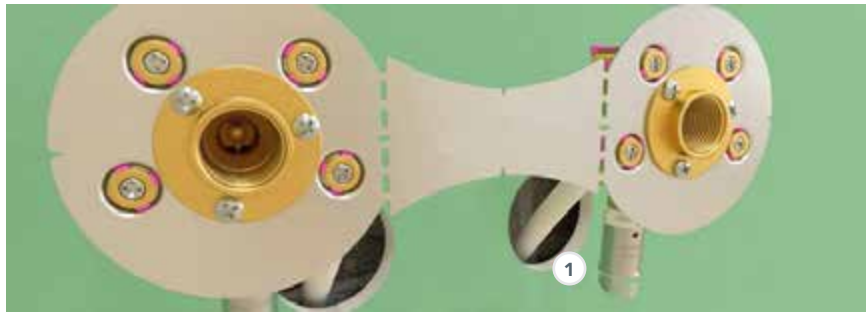

1 ø 68 mm

Breakable plate



Accessible fittings with two-year warranty



Installation of your tapware made easy!



## ADDITIONAL INFORMATION

- It is recommended to apply a silicone seal between the elbows and the tiling to prevent leaks.
- This operation may also be useful within the framework of the standard for RT 2012 insulation.



### STORAGE WARNINGS

Store the product in the closed package/container in a clean area protected from frost, moisture, exposure to sunlight, heat sources, open flames or sources of ignition. Avoid sudden temperature fluctuations by maintaining optimal temperature and humidity conditions (temperature 10-35 °C / humidity <80%). Ensure that there is no danger of damage from the presence of other miscellaneous materials or possible handling by unauthorized persons. Please refer to the individual product data sheet for further details of proper storage.

RBM spa reserves the right to improve and change the products described and relevant technical data at any moment and without prior notice. The information and images contained in this document are intended for information purposes only, are not binding and in any case do not exempt the user from strictly following the regulations in force and good practice standards.